


IG-32PGM

01 & 02 TYPE



外形尺寸/ Appearance Size

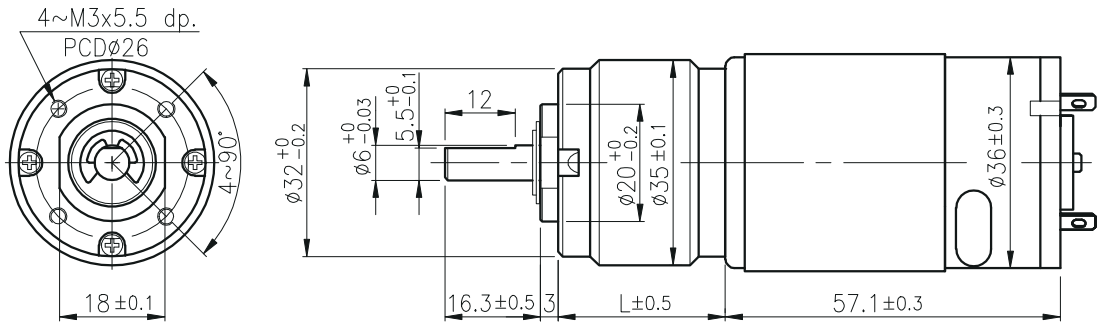

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

減速比 Reduction ratio	1/5	1/14	1/19	1/27	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721						
12V 定格扭力 Rated torque (Kg-cm)	1	2.4	3.3	4.7	7.6	8	10	10	12	12	12	12						
12V 定格轉數 Rated speed (rpm)	950	359	257	183	97	71.5	52	39	29	21	11	8						
24V 定格扭力 Rated torque (Kg-cm)	1	2.3	3.2	4.5	7.3	8	10	10	12	12	12	12						
24V 定格轉數 Rated speed (rpm)	990	375	268	192	101	74.5	54	40	29.5	22	11.5	8						
軸心迴轉方向 Rotation direction	CCW																	
長度 Length (L)	22.1		28.5				34.9				41.3							

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	250	4930	≤ 1600	6000	≤ 250	12.80	220
24	240	5150	≤ 750	6000	≤ 130	12.70	220

馬達單體特性/ Motor Characteristics

